




90 River Street . New Haven, CT 06513 . Local: 203-772-4700 . toll free: 866-265-2372 . fax: 203-772-0020 . www.aercontrolsystems.com

Portable Fume Collector Series



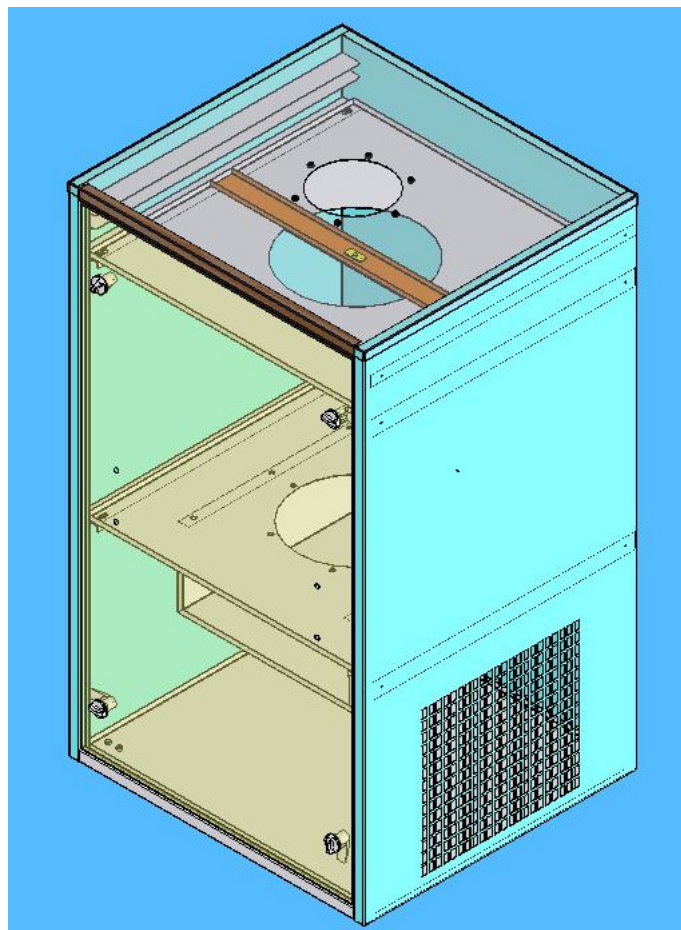

866-265-2372

www.aercontrolsystems.com

mail@aercontrolsystems.com

AER Portable Fume Collector Series, Cartridge, Fiberglass, HEPA, or Carbon

AER Control Systems AER Portable Fume Collectors (PFC) are designed to provide efficient, cost effective control dust, fume, smoke and odor contaminants generated from a variety of manufacturing and process applications. Typically used for control of moderate concentrations of dry contaminants, the PFC series can be used on a variety of processes that generate dust, fume, smoke or odor. The PFC series unit is designed for a low cost alternative using filters that are designed to be thrown away rather than cleaned with a built in cleaning system. The cartridge unit can be cleaned via a industrial shop vacuum rather than disposing the filter. The Portable Fume Collector will help with compliance to local OSHA regulations by drawing contaminants away from the operator's breathing zone and reduce emissions to an acceptable level.

The PFC Series Collector comes standard with a first stage of metal mesh filter and second stage is either an 164 square feet of 80/20 polyester blend cartridge or a washable spun bond cartridge of 90 square feet of filter area with an efficiency rating of 99% at 0.5 microns. Also standard is a single phase 1 HP TEFC motor with non-overloading direct drive blower, tool-less filter access door. Other filters can be used instead of the cartridge such as a fiberglass/ HEPA combination or a HEPA/ Carbon combination depending on the type of contaminant.

If smoke is present an additional 99.97% at 0.3 micron HEPA cabinet can be added.

Portable Fume Collector	
Nominal CFM	1000
Motor HP	1.0
Size, WxDxH	27"x 24"x 49" less the 6' x 7' arm

FEATURES

- Standard Airflow 1000 CFM using a 1.0 horsepower single phase TEFC motor.
- Power cord and switch.
- 99% cartridge filter efficiency at 0.5 microns
- Standard 6' x 7' Extraction Arm
- 3" Casters
- Heavy duty construction with Kelly Green industrial textured powder coat finish.
- Direct drive backward inclined airfoil non-overloading fan.
- Mini-helic filter change-out guage.