


AER PORTABLE FUME BOOTH

Extraction Arm Unit

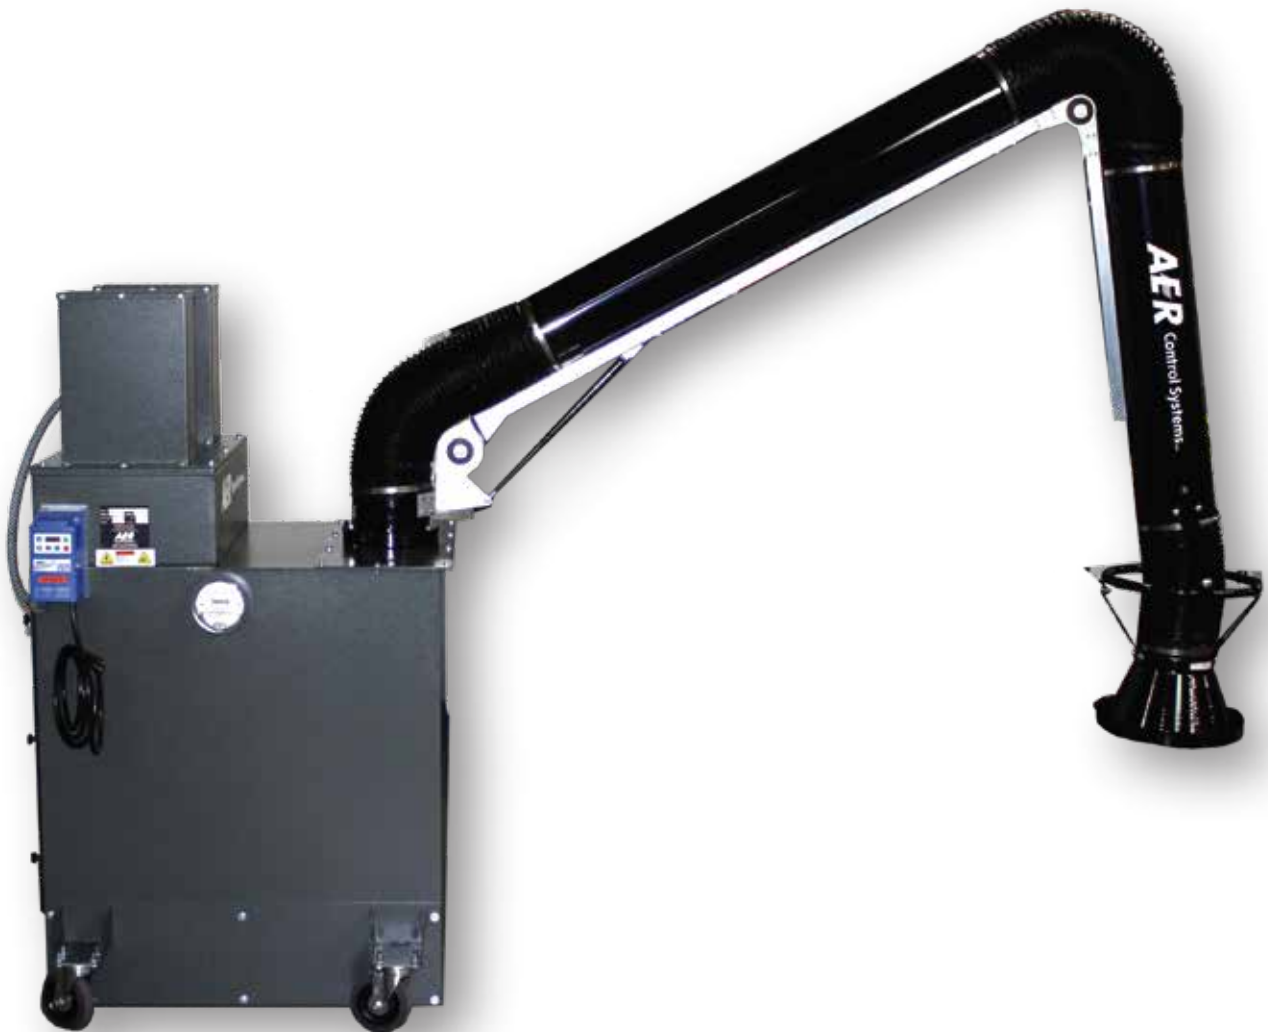

AER
Control Systems LLC

(866) 265-2372

Units AERcontrolsystems.com

Filters IndustrialReplacementFilters.com

AER PORTABLE FUME BOOTH

Extraction Arm Unit

AER Control Systems AER Portable Fume Booth is designed to provide efficient and cost effective control of dust, fume, smoke, and odor contaminants generated from a variety of different manufacturing and process applications including; paint fumes, solvents, and flammable fumes with odor. The Fume Booth is typically used for control of moderate concentrations of contaminants from processes that generate dust, fume, smoke, or odor. The Fume Booth is designed as a low cost alternative by using filters that are designed to be thrown away rather than cleaned with a built in cleaning system. The Portable Fume Booth will help with compliance to local OSHA regulations by drawing contaminants away from the operator's breathing zone and reducing emissions to a safe and acceptable level.

The Portable Fume Booth comes standard with: a first stage throw-away ring polyester filter, a second stage MERV 14 Fiberglass Box filter, a third stage re-fillable double 28 lb carbon panel for a total of 56 lbs of activated carbon, and lastly a 4th stage after filter. Also standard is a single phase 1.5 HP TEFC motor with a non-overloading direct drive blower, and a tool-less filter access door. Other filters can be used, such as a HEPA filter, depending on the type of contaminant present. Fumes are pulled up through the 6" by 10' extraction arm at 1000 CFM.

A variety of filter options are available, the type of filter used depends on the contaminant. For inquiries about replacement filters visit AERFilterSales.com.



FEATURES

- ▶ Standard Airflow of 1000 CFM when using a 1.5 HP single phase TEFC motor.
- ▶ Motor located out of the exhaust air stream.
- ▶ Industrial textured powder coat finish.
- ▶ Direct drive non-sparking backward inclined airfoil non-overloading fan.
- ▶ Magnahelic filter change-out gauge.

OPTIONS

- ▶ 1 HP aluminum blower for highly flammable applications.
- ▶ 1.5 HP TEFC motor and blower.
- ▶ 6" inlet collar for hose or ducted applications.
- ▶ 6" x 7' extraction arm available
- ▶ Table tops available in 30" x 24" and 48" x 24"
- ▶ Slotted backdraft hood with adjustable slots and hinged side panels.
- ▶ 12' Extension Shelves.
- ▶ Non-marking table top mat.
- ▶ Filter configuration based on application.